

WE LEAD.
WE LEARN.



WISA®-MULTIFLOOR

WISA-Multifloor is a high quality flooring panel coated with thermoplastic polyolefin coating.

End use

WISA-Multifloor has been specially designed and developed for van floors and service vans, but it can also be used in other applications when good looking and resistant flooring material is needed: stages, spectator stands, play grounds and sport hall applications.

Bonding

Phenolic resin cross-bonded weather resistant glueing according to EN 314-2 / class 3. Glueing of coating EN 204 class 4.

Coating

Weight: 800 g/m²

Pattern: ripple pattern.

1.35 mm on the top of the pattern (ripple)

Colour: grey RAL 7010.

Reverse side: grey slightly embossed polypropylene coating

Machining

Shapes, profiles and drillings according to customer's drawings available on request.

Panel sizes

1200/1220/1250/1500/1525 x 2400/2440/2500/3000/3050/3600 mm

Other dimensions on request.

Thicknesses and weights

Please note that nominal thickness is plywood thickness and actual thickness is the thickness of a coated panel.

Nominal thickness (mm)	Number of plies	Actual thickness (mm)	Min. thickness (mm)	Max. thickness (mm)	Weight (kg/m ²)
6.5	5	7.8	7.3	8.3	5.3
9	7	10.4	10.0	10.9	7.1
12	9	13.3	12.7	13.9	9.0
15	11	16.1	15.5	16.7	10.9
18	13	18.9	18.3	19.5	12.8
21	15	21.7	21.2	22.3	14.8
24	17	24.6	24.1	25.1	16.7
27	19	27.3	26.4	28.8	18.5
30	21	30.3	29.3	31.3	20.6

Moisture content 8-10%.





Properties of panel surface

Taber abrasion DIN 53799 : 5000 r

Rolling test (SS 923502) charge 100 kg: 41000 rounds

Cobb: (7 days) 20

Cleanability: easy to clean with water and detergent.


UV-resistance: coating supplier's guarantee for colour resistance, colour stability (6-7 according to EN ISO 105-B02)

- Taint and odour free
- Elastic, non cracking coating
- Does not contain any chlorine
- Good chemical resistance (standard ISO 175)

Strength values

As per the Handbook of Finnish Plywood.

For further information of installation, maintenance, disposal, environmental matters etc. please contact your supplier or UPM.

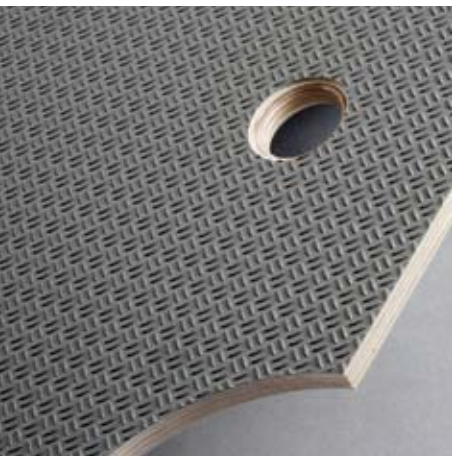

UPM Plywood

Niemenkatu 16

P.O. Box 203

FI-15141 Lahti

Finland

Tel. +358 204 15 113

Fax +358 204 15 112

www.wisa.com

www.upm-kymmene.com

UPM policy is one of continuous development. We reserve the right to amend specifications without notice or obligation.